

The Piper logo consists of the word "PIPER" in a bold, sans-serif font, enclosed within a dark, rounded rectangular border. The logo is positioned in the upper left corner of the document.

Customer Services

SERVICE LETTER

No. 675

Piper Aircraft Corporation

Lock Haven, Pennsylvania, U.S.A.

September 17, 1973

AD-74-26-10

Subject:

Magneto Switch Guard Installation

Models Affected:

PA-31 and PA-31-300 Navajo
PA-31-350 Navajo Chieftain
PA-31P Navajo

Serial Numbers Affected:

31-2 to 31-7300969 incl.
31-5001 to 31-7305091 incl.
31P-1 to 31P-7300161 incl.

Compliance Time:

Recommended at the next scheduled inspection interval.

Purpose:

To announce the availability of field installation kits containing material and instructions to install a protective barrier across the face of the magneto switches on the above referenced aircraft.

The magneto switches on the Navajo Series aircraft are located on the overhead instrument panel and are "rocker" type switches. Installation of the subject switch guards will assist in preventing inadvertent magneto switch shut-off. Refer to sketch on reverse side of this letter for a general illustration of the switch guard installation.

Instructions:

Contained in applicable magneto switch guard installation kits (reference Material Required, below).

Material Required:

1. PA-31 and PA-31-300 Navajos and PA-31-350 Navajo Chieftain -- reference Serial Numbers Affected, above; one (1) each per aircraft Magneto Switch Guard Installation Kit, Piper Part No. 760 789, at \$3.76A suggested retail unit price.
2. PA-31P Navajo -- reference Serial Numbers Affected, above; one (1) each per aircraft Magneto Switch Guard Installation Kit, Piper Part No. 760 790 at \$1.94A suggested retail unit price.

Availability of Parts:


Your Piper Dealer.

Effectivity Date:


This Service Letter is effective October 5, 1973.

Summary:

Please contact your Piper Dealer to make arrangements for procurement and installation of the above referenced magneto switch guards. Average installation time required is estimated to be approximately one (1) man hour.

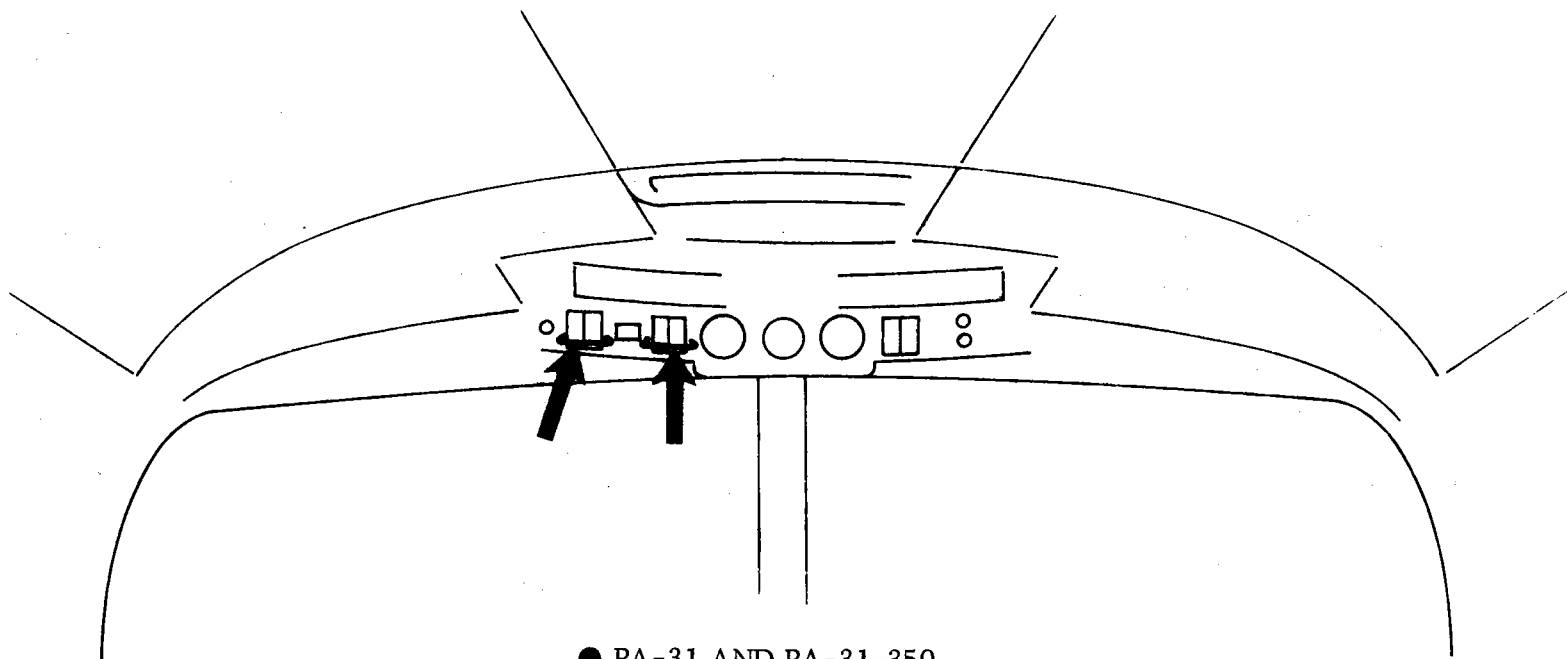

● PA-31 AND PA-31-350

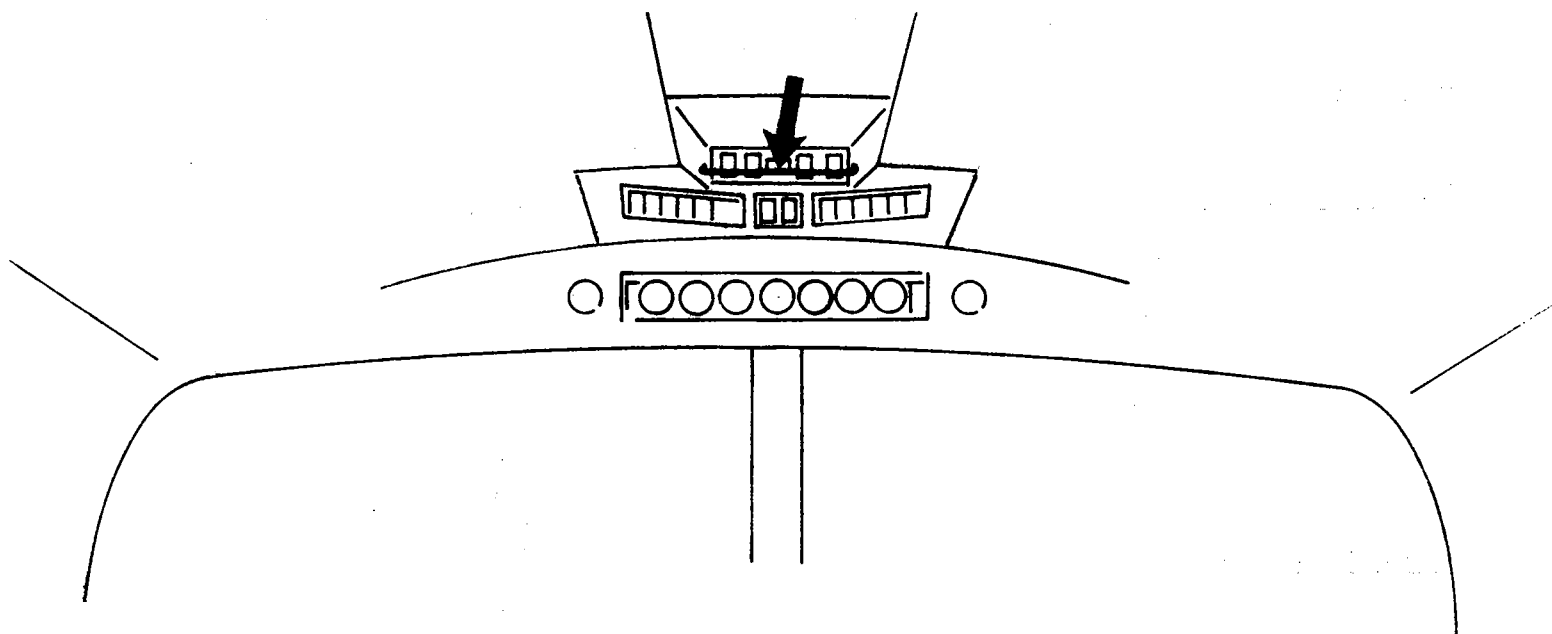

● PA-31P